

GUIDANCE NOTES FOR ROBINSONS VICTORIAN DWARF WALL GREENHOUSE.

FOOTINGS

CONCRETE STRIP FOOTINGS SHOULD BE A MINIMUM OF 400mm WIDE x 200mm DEEP. IF THE SITE IS ON MADE UP GROUND IT IS IMPORTANT THAT THE FOOTINGS ARE CUT INTO THE COMPACTED GROUND BELOW.

WHERE THE GROUND IS LIABLE TO MOVEMENT SUCH AS HEAVY CLAY OR LOOSE SANDY SOIL, REINFORCING SHOULD BE ADDED TO THE CONCRETE FOOTINGS.

WALLS

IT IS MOST IMPORTANT THAT THE BRICKWORK IS IN ACCORDANCE WITH THE DIMENSIONS PROVIDED AND IS SQUARE, LEVEL AND UPRIGHT. THE DIAGONAL MEASUREMENTS MUST BE EQUAL.

WALLS CAN BE EITHER DOUBLE OR SINGLE SKIN.

THE TOP COURSE OF BRICKS SHOULD BE LAID FROG DOWN.

BRICKS SHOULD BE A GOOD QUALITY STOCK BRICK. SAND FACED FLETTON TYPE BRICKS ARE NOT SUITABLE.


IF ENGINEERING BRICKS ARE USED FOR THE TOP COURSE PLEASE ENSURE THEY ARE SOLID NOT CELLULAR (WITH HOLES THROUGH THEM) OR FROG DOWN OF THE GREENHOUSE WILL BE A PROBLEM.

GABLE DOOR OPENING

THE DOOR THRESHOLD REQUIRES BRICK WORK ACROSS THE OPENING WHICH SHOULD BE LEVEL WITH THE FINISHED FLOOR LEVEL OF THE GREENHOUSE.


THE OPENING FOR THE DOORWAY IS 1.280m AND THE HEIGHT TO THE TOP OF THE WALL IS 0.800m ABOVE THE THRESHOLD LEVEL. THE ACCURACY OF THESE MEASUREMENTS ARE MOST IMPORTANT.

IF SINGLE SKIN WALLS ARE USED THEN PIERS SHOULD BE FORMED AT THE DOOR OPENING.

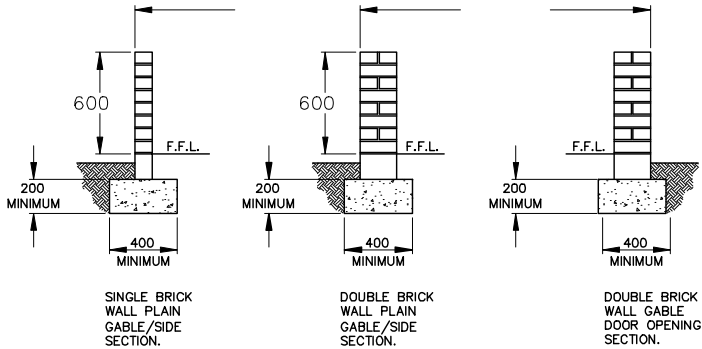

THIS PLAN APPLIES TO GREENHOUSES WITH DOORS AT ONE END ONLY.

OVER ALL LENGTH 'L' = BASIC GREENHOUSE LENGTH + EXTENSION IF REQUIRED			
MODEL REFERENCE	BASIC GREENHOUSE LENGTHS	EXTENSION REFERENCE	GREENHOUSE EXTENSION LENGTHS
06	1990mm	06	1860mm
08	2610mm	08	2480mm
10	3230mm	10	3100mm
12	3850mm	12	3720mm

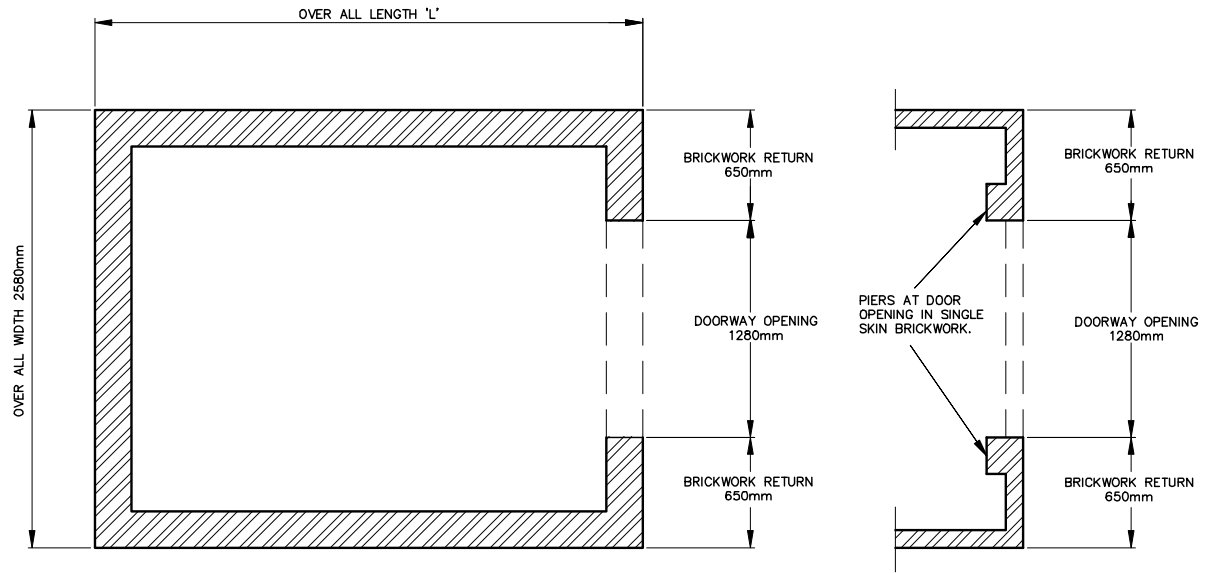

STATION WORKS, FENNY COMPTON
WARWICKSHIRE. CV47 2XB

PRODUCT		ROBINSONS		DRAWN BY		MJH		SCALE		N.T.S.	
DESCRIPTION		DWARF WALLS FOR 8FT VICTORIAN GREENHOUSES.		CHECKED		DATE		JAN 2010			
ISSUE		1	2								
			SEPT 10								
LIBRARY No.		ROBVIC/DW-2									